


Plastic Industry Thermocouples

Pipe Clamp Style Thermocouple

Maximum operating temperature: 900F or 500C

Model Code: **G1**

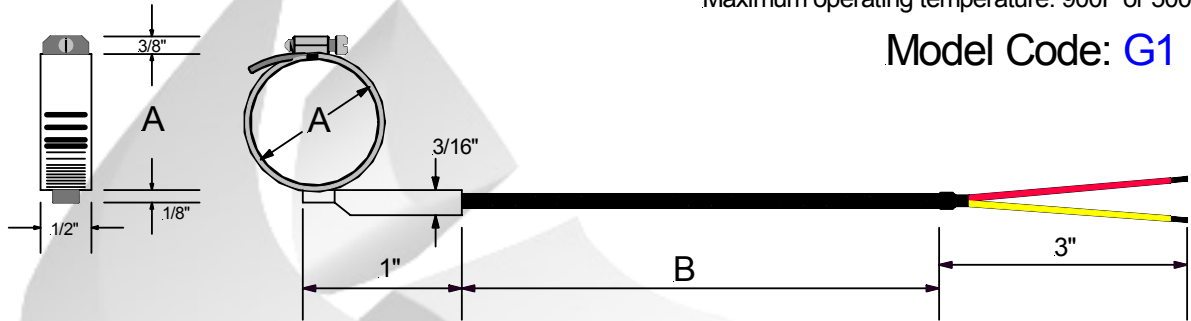

Steps To Follow:

Model No. **G1** 1. 2. 3. 4. 5. 6.

1. Pipe Clamp Description
A= Diameter Range

	Minimum	Maximum
1	1 1/16"	2"
2	1 13/16"	2 3/4"
3	2 9/16"	3 1/2"
4	3"	5"
5	5"	7"

4. "B" Dimension

"B"= 0 4 8 "

Leads Wire Length In Inches

2. Wire Description

S	20 Gage Stranded Stainless Steel Braid
X	Flexible Armor Cable
F	20 Gage Stranded Fiberglass Cable

5. Termination Type

A	3" Split Leads & 1/2" Bare Ends.
B	3" Slip Leads & Spade Lugs
C	Standard Male Plug
D	Standard Female Jack
E	Mini Male Plug
F	Mini Female Jack

3. Calibration

J	(+) Iron Vs. (-) Constantan
K	(+) Ni.-Chromium Vs. (-) Ni.-Aluminum

6. Accessories

1	None
2	Bx Connector
3	Cable Clamp